



LMSD3079 Cup SM Adjustable

Description

- Stylish and functional, the Cup SM is right at home in any Multi-residential, or Commercial setting
- Excellent glare control and available in all major lighting control types
- 45D tilt & 355 Degree rotation allow for increased aiming flexibility
- Get creative with any number of on-trend trim and reflector colour options
- Photometric data shown is for module and Individual lenses only
- Customisations available on request



Finish

Black/White/Gold/Wood



Material

Aluminium

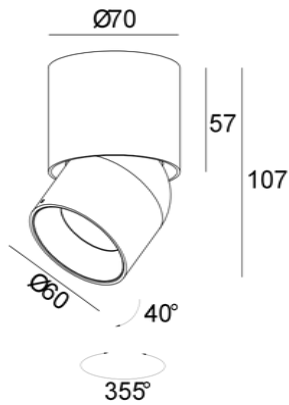

TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB
 Output (W): 8W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 90
 Installation Method: Ceiling Surface Mounted
 System Lumen: 550lm
 System efficacy: 83lm/W
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: <19
 IP Rating: IP21

PHYSICAL CHARACTERISTICS

Dimensions: Ø60*107mm
 Cutout: N/A
 Rotate Angle: 355°
 Tilt Angle: 45°

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

LIGHT DISTRIBUTION for 3000K medium 32°

h(m)	E(lx)	Ø(m)
1	1050	
2	262.6	Ø0.62
3	116.7	Ø1.25
4	65.65	Ø1.88
5	42.02	Ø2.50
		Ø3.13



The photograph may not match the reference exactly. Please read the product description to identify the finish.