

LMDL3703

Mini 38 Adjustable

Description


- Mini spot light, adjustable through 20° angle of tilt
- Deep recessed baffle for excellent glare control
- Available in all major lighting control types
- CRI90 as standard

Finish

Black/White

Material

Aluminium, PMMA



TECHNICAL CHARACTERISTICS


Light source: Bridgelux COB
 Output (W): 3W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 90
 Installation Method: Ceiling Recessed
 System Lumen: 150lm
 System efficacy: 50lm/W
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: <17
 IP Rating: IP20

PHYSICAL CHARACTERISTICS

Dimensions: Ø42*52mm
 Cutout: Ø38mm
 Rotate Angle: N/A
 Tilt Angle: 20°

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

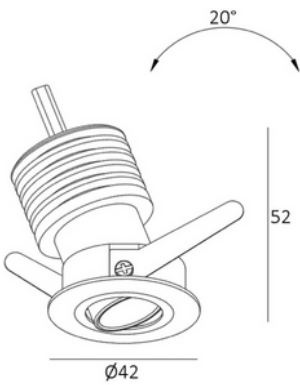

⌀ 38mm
 ▨ 5-25mm

