



LMSD3049

Dash Spot Maxi SM



Description

- Stylish, fully adjustable surface mounted spot
- Deep recessed with multiple baffle colour options
- Available in 80, 90 and 97 CRI
- Photometric data shown is for module and Individual lenses only
- Customisations available on request

Finish
Black/White



Material
Aluminium

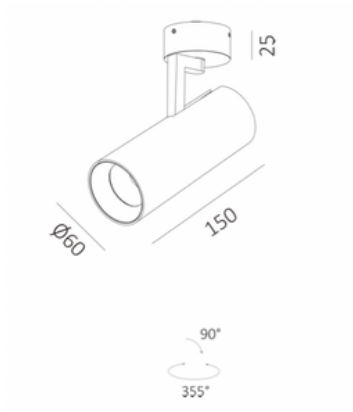

TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB
 Output (W): 12W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 80/90/97
 Installation method: Ceiling Surface Mounted
 System Lumen: 1020lm
 System efficacy: 85lm/watt
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: 19
 IP Rating: IP20

PHYSICAL CHARACTERISTICS

Dimensions: Ø60*150mm
 Cutout: N/A
 Rotate Angle: 355°
 Tilt Angle: 90°

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

LIGHT DISTRIBUTION for 3000K medium 37°

h(m)	E (lx)	Ø(m)
1	1700	Ø0.67
2	425	Ø1.35
3	188.9	Ø2.03
4	106.2	Ø2.70
5	68	Ø3.38

Photometric 3000K 36D Ra.90