


## LMLD1850

### Pursuit Track Light

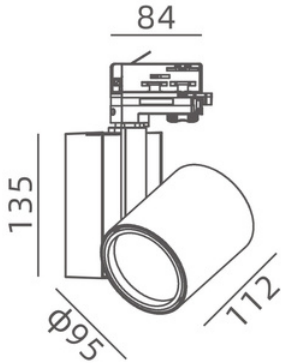

#### Description


- Designed for commercial lighting applications - Retail and Hospitality
- System efficacy of 91lm/W at CRI90
- High efficiency reflector
- DALI and Phase-Cut lighting control supported
- Customisations available on request

#### Finish

Black/White

#### Material

Aluminium



#### TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB  
 Output (W): 30W  
 Voltage: 240V  
 Color temperature: 3000K/4000K/5000K  
 CRI: 80/90  
 Installation method: 3-Circuit Track Mounted  
 System Lumen: 2730lm  
 System efficacy: 91lm/watt  
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm  
 Life Time: 50.000h  
 MacAdam steps: 3  
 UGR: 14  
 IP Rating: IP20

#### PHYSICAL CHARACTERISTICS

Dimensions: Ø95\*112mm  
 Cutout: NA  
 Rotate Angle: 355°  
 Tilt Angle: 90°

#### Additional

Warranty: 3 Years  
 (optional 5 year warranty on request)

#### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

