

LMDL3058/LMDL3052

Drop Pendant

Description

- Stunning Brushed Brass Glass Drop with Glittering Foils
- Alternative recessed white ceiling canopy available
- Further customisations available on request

Finish

Brushed Brass

Material

Aluminium/Glass



TECHNICAL CHARACTERISTICS




Light source: Osram Oslon Square
 Output (W): 3W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 90
 Installation method: Pendant/Canopy recessed
 System Lumen: 140lm
 System efficacy: 68lm/watt
 Dimming Type: Non-Dim, Phase-Cut
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: N/A
 IP Rating: IP20

PHYSICAL CHARACTERISTICS

Dimensions: Ø50*350mm
 Cutout: N/A
 Rotate Angle: N/A
 Tilt Angle: N/A

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

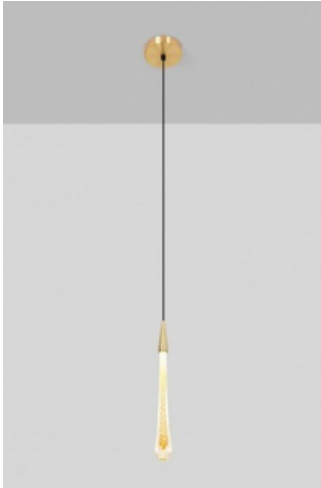

LMDL3052



LMDL3058

DL3635

Multi functional recessed mount ceiling kit

Recessed kit for pendant;
 Wide ceiling thickness allowance;
 c/w cable restrain;
 Adjustable wire length;
 Dual color magnet front lid.

