

LMDL7007 Ecolux Highbay

Description

- Optional remote control, motion and daylight sensing capabilities
- Ultra-high luminous efficacy of 180lm/W
- 1-10V dimmable driver optional
- IP65 and IK08 for tough environments

Finish
Black

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source: Samsung SMD2835
 Output (W): 120W/150W/200W
 Voltage: 240V
 Color temperature: 5000K
 CRI: 80
 Installation method: Ceiling Suspended
 System Lumen: 21600lm/27000lm/36000lm
 System efficacy: 180lm/watt
 Dimming Type: Non-Dim, 0-10V
 Life Time: 60.000h
 MacAdam steps: 3
 UGR: N/A
 IP Rating: IP65
 IK Rating: IK08



PHYSICAL CHARACTERISTICS

Dimensions: 120-150W Ø305*H154.5mm
 200W Ø364*H174mm
 Cutout: N/A
 Rotate Angle: N/A
 Tilt Angle: N/A


Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

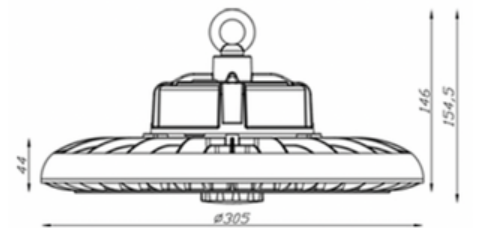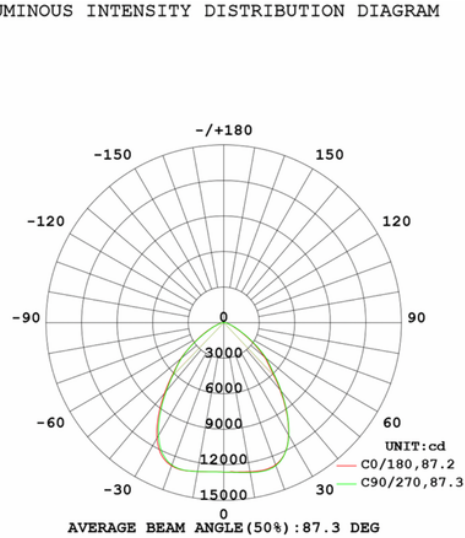

120-150W

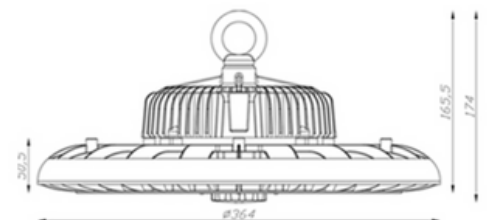

200W