

LMBS3090

Landscape Garden Spike

Description


- 24V constant voltage dimming;
- 0-90° adjustable, 0-25mm module depth adjustable Module design
- Modular design with multi step snoot levels
- Honeycomb louver available for further glare reduction
- Matching outdoor wall light available

Finish

Black/White

Material

Aluminium



TECHNICAL CHARACTERISTICS


Light source: Bridgelux COB
 Output (W): 8W
 Voltage: DC24V Constant Voltage
 Color temperature: 2700K/3000K/4000K
 CRI: 90
 Installation method: External
 System Lumen: 640lm
 System efficacy: 80lm/watt
 Dimming Type: Non-Dim, Phase-cut dim
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: 14
 IP Rating: IP65

PHYSICAL CHARACTERISTICS

Dimensions: Ø57*135mm
 Cutout: NA
 Rotate Angle: NA
 Tilt Angle: 0°-90°

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

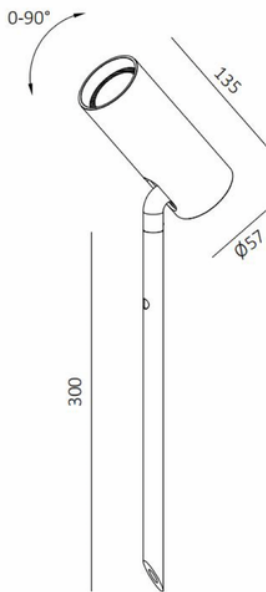

PHOTOMETRIC DATA

LIGHT DISTRIBUTION for 3000K
 medium 36.1°

h(m)	E(lx)	Ø(m)
1	978	Ø0.65
2	244	Ø1.3
3	108	Ø1.95
4	61	Ø2.6
5	39	Ø3.25

