




LMPL3005 Star Tube Pendant

Description

- 10W Suspended LED Downlight
- Available in 2700K/3000K/4000K Colour Temperature
- CRI90 as standard, with multiple beam angle options
- 1.5mtr suspension cable with ceiling canopy
- Integral driver
- All major control types supported

Finish
White

Material
Aluminium



TECHNICAL CHARACTERISTICS


Light source: Bridgelux COB
 Output (W): 10W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 90
 Installation method: Surface mounted/Suspended
 System Lumen: 800lm
 System efficacy: 80lm/watt
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: 19
 IP Rating: IP20

PHYSICAL CHARACTERISTICS

Dimensions: Ø70*140mm
 Cutout: NA
 Rotate Angle: NA
 Tilt Angle: NA

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

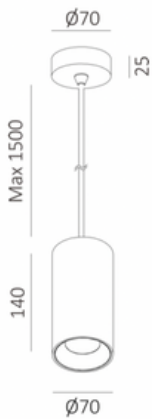

LIGHT DISTRIBUTION for 3000K medium 36°

| h(m) | E(lx) | Ø(m) |
|------|-------|-------|
| 1 | 1218 | Ø0.65 |
| 2 | 304.6 | Ø1.30 |
| 3 | 135.4 | Ø1.95 |
| 4 | 76.15 | Ø2.60 |
| 5 | 48.74 | Ø3.25 |

Photometric 3000K 36D Ra.90