




LMDL3593 Archi Spot Trimless Adjustable


Description

- Architectural recessed spotlight with dual colour baffle and slim trim
- Fully adjustable 45° tilt and 320° rotate angle
- UGR19 low glare and CRI90 as standard
- Customisations available on request

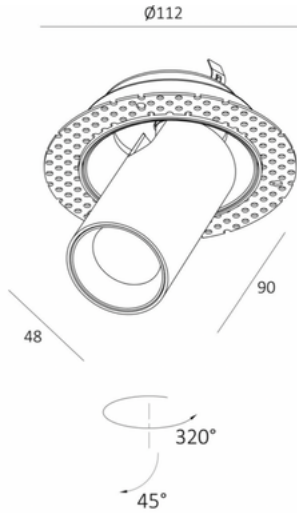

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB
 Output (W): 9W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 90
 Installation Method: Ceiling Recessed
 System Lumen: 765lm
 System efficacy: 85lm/W
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: <19
 IP Rating: IP20

PHYSICAL CHARACTERISTICS

Dimensions: Ø48*90mm
 Cutout: Ø90mm
 Rotate Angle: 320°
 Tilt Angle: 45°
Additional
 Warranty: 3 Years
 (optional 5 year warranty on request)

LIGHT DISTRIBUTION for 3000K medium 23°

h(m)	E(lx)	Ø(m)
1	1660	Ø0.39
2	415.1	Ø0.79
3	184.5	Ø1.19
4	103.8	Ø1.59
5	66.41	Ø1.98