





## LMTR3095 Luxe Track Light

### Description

- Versatile, stylish and functional the Luxe Track Light is purpose built for retail and commercial application
- UGR19 low glare and CRI90 as standard
- 3-Circuit/4-wire
- Customisations available on request

**Finish**  
Black/White

**Material**  
Aluminium

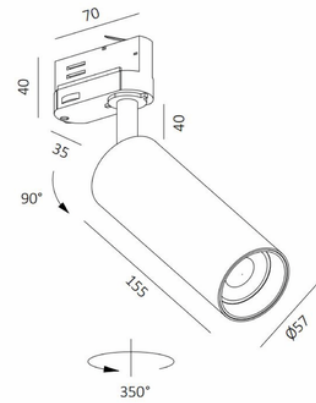

### TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB  
 Output (W): 15W  
 Voltage: 240V  
 Color temperature: 2700K/3000K/4000K  
 CRI: 90  
 Installation Method: 3-Circuit Track Mounted  
 System Lumen: 1227lm  
 System efficacy: 82lm/W  
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm  
 Life Time: 50.000h  
 MacAdam steps: 3  
 UGR: <19  
 IP Rating: IP20

### PHYSICAL CHARACTERISTICS

Dimensions: Ø57\*155mm  
 Cutout: NA  
 Rotate Angle: 350°  
 Tilt Angle: 90°

### Additional

Warranty: 3 Years  
 (optional 5 year warranty on request)

### LIGHT DISTRIBUTION for 3000K Medium 36°

h(m)	E(lx)	Ø(m)
1	2871	Ø0.70
2	717.7	Ø1.40
3	319	Ø2.10
4	179.4	Ø2.80
5	114.8	Ø3.50

