





LMDL3001 Acclaim Pinhole

Description

- Designed for accent lighting, hallways and highlighting of feature walls
- IP54 rated, suitable for application in bathrooms and general wet areas
- Deep set recessed with a black baffle to reduce glare
- Customisations available on request

Finish
Black/White

Material
Aluminium

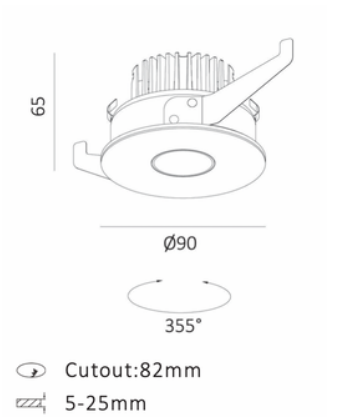

TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB
 Output (W): 10W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 80/90/97
 Installation Method: Ceiling Recessed
 System Lumen: 700lm
 System efficacy: 70lm/W
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: <19
 IP Rating: IP54

PHYSICAL CHARACTERISTICS

Dimensions: Ø90*65mm
 Cutout: Ø82mm
 Rotate Angle: 355°
 Tilt Angle: NA

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

LIGHT DISTRIBUTION for 2700K wide 36°

| h(m) | E (lx) | Ø(m) |
|------|--------|-------|
| 1 | 1619 | Ø0.64 |
| 2 | 404.8 | Ø1.29 |
| 3 | 179.9 | Ø1.94 |
| 4 | 101.2 | Ø2.59 |
| 5 | 64.77 | Ø3.24 |

Photometric 2700K 36D Ra.90

