

## LMDL3562 Archi Spot Adjustable

### Description

- Architectural recessed spotlight with dual colour baffle and slim trim
- Fully adjustable 45° tilt and 320° rotate angle
- UGR19 low glare and CRI90 as standard
- Also available in Trimless
- Customisations available on request

### Finish

Black/White

### Material

Aluminium




### TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB  
 Output (W): 9W  
 Voltage: 240V  
 Color temperature: 2700K/3000K/4000K  
 CRI: 90  
 Installation Method: Ceiling Recessed  
 System Lumen: 765lm  
 System efficacy: 85lm/W  
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm  
 Life Time: 50.000h  
 MacAdam steps: 3  
 UGR: <19  
 IP Rating: IP20

### PHYSICAL CHARACTERISTICS

Dimensions: Ø48\*90mm  
 Cutout: Ø90mm  
 Rotate Angle: 320°  
 Tilt Angle: 45°  
**Additional**  
 Warranty: 3 Years  
 (optional 5 year warranty on request)

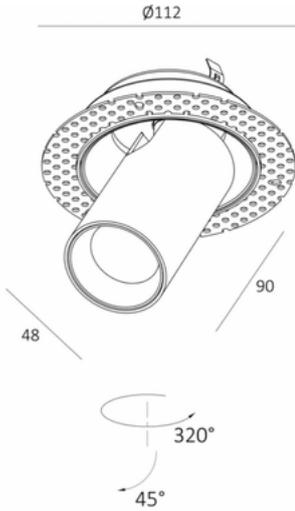

### LIGHT DISTRIBUTION for 3000K medium 23°

h(m)	E(lx)	Ø(m)
1	1660	Ø0.39
2	415.1	Ø0.79
3	184.5	Ø1.19
4	103.8	Ø1.59
5	66.41	Ø1.98