

LMDL3621 Curve Mini Fixed





Description

- Micro downlight with curved bezel, suitable for residential and commercial application
- Deep recessed design, UGR19 low glare and CRI90 as standard
- IP54 rated, suitable for bathroom and wet area application
- Customisations available on request

Finish
Black/White

Material
Aluminium

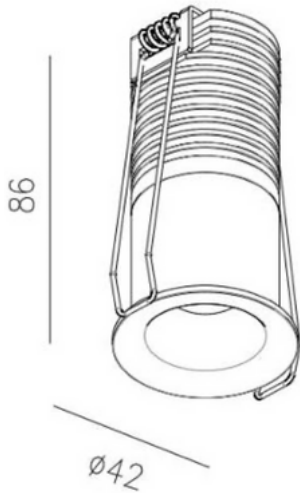

TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB
 Output (W): 8W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 90
 Installation Method: Ceiling Recessed
 System Lumen: 520lm
 System efficacy: 65lm/W
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: <19
 IP Rating: IP54

PHYSICAL CHARACTERISTICS

Dimensions: Ø42*86mm
 Cutout: Ø36mm
 Rotate Angle: NA
 Tilt Angle: NA

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

LIGHT DISTRIBUTION for 2700K medium 19°

h(m)	E (lx)	Ø(m)
1	759.9	Ø0.56
2	190	Ø1.13
3	84.4	Ø1.69
4	47.5	Ø2.25
5	30.4	Ø2.82

Photometric 2700K 24D Ra.90

