

LMSD3015

Cypher SM



Description

- Designed for Residential and Architectural application
- Interchangeable black/white baffles with optional honeycomb Louvre
- Bridgelux COB, CRI90 as standard
- Supports all major lighting control types
- Customisations available on request

Finish

Black/White



Baffle




AW



AB

Material

Aluminium



TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB

Output (W): 10W

Voltage: 240V

Color temperature: 2700K/3000K/4000K

CRI: 90

Installation method: Ceiling Surface Mounted

System Lumen: 800lm

System efficacy: 80lm/watt

Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm

Life Time: 50.000h

MacAdam steps: 3

UGR: 21

IP Rating: IP20

PHYSICAL CHARACTERISTICS

Dimensions: Ø79.5*150mm

Cutout: N/A


Rotate Angle: N/A

Tilt Angle: N/A

Additional

Warranty: 3 Years

(optional 5 year warranty on request)

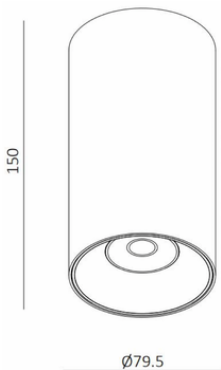

LIGHT DISTRIBUTION for 3000K medium 36°

h(m)	E(lx)	Ø(m)
1	1213.2	Ø0.58
2	308.3	Ø1.16
3	140.36	Ø1.74
4	79.58	Ø2.32
5	45.33	Ø2.90

Photometric 3000K 36D Ra.90

