



LMDL3688

Eclipse Multi

Description



- Ultra compact design, Fix and Tilt
- White, black, bronze interchangeable baffle
- Aluminium CNC body and baffle
- 15° to 50° beam angle
- IP44 rated

Finish

Black/White/Bronze

Material

Aluminium

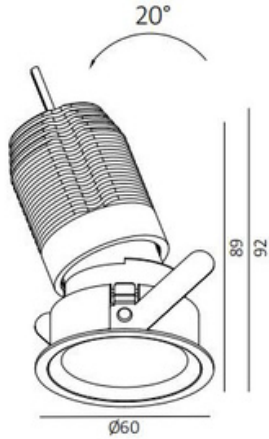

⌀ 55mm
 ≏ 5-25mm

TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB
 Output (W): 12W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 90
 Installation Method: Ceiling Recessed
 System Lumen: 960lm
 System efficacy: 80lm/W
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: <19
 IP Rating: IP44

PHYSICAL CHARACTERISTICS

Dimensions: Ø60*89mm
 Cutout: 55°mm
 Rotate Angle: N/A
 Tilt Angle: 20°

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

LIGHT DISTRIBUTION for 3000K spot 15°

| h(m) | E(lx) | Ø(m) |
|------|-------|-------|
| 1 | 5459 | Ø0.32 |
| 2 | 1365 | Ø0.64 |
| 3 | 606.6 | Ø0.96 |
| 4 | 341.2 | Ø1.28 |
| 5 | 218.4 | Ø1.60 |

LIGHT DISTRIBUTION for 3000K medium 24°

| h(m) | E(lx) | Ø(m) |
|------|-------|-------|
| 1 | 3684 | Ø0.42 |
| 2 | 921 | Ø0.84 |
| 3 | 409.3 | Ø1.26 |
| 4 | 230.2 | Ø1.68 |
| 5 | 147.4 | Ø2.10 |



LIGHT DISTRIBUTION for 3000K medium 36°

| h(m) | E(lx) | Ø(m) |
|------|-------|-------|
| 1 | 1429 | Ø0.66 |
| 2 | 357.4 | Ø1.33 |
| 3 | 158.8 | Ø1.99 |
| 4 | 89.34 | Ø2.66 |
| 5 | 57.18 | Ø3.33 |

LIGHT DISTRIBUTION for 3000K wide 50°

| h(m) | E(lx) | Ø(m) |
|------|-------|-------|
| 1 | 638.5 | Ø1.13 |
| 2 | 159.6 | Ø2.26 |
| 3 | 70.9 | Ø3.39 |
| 4 | 39.9 | Ø4.53 |
| 5 | 25.5 | Ø5.66 |

