

LMDL3682

Fuse Trimless Adjustable

Description

- Sleek, versatile and trimless
- Semi recessed and adjustable with 20° angle of tilt
- IP65 rated for outdoor application
- CRI90 as standard
- Customisations available on request

Finish

Black/White

Material

Aluminium



TECHNICAL CHARACTERISTICS


Light source: Bridgelux COB
 Output (W): 6W
 Voltage: 240V
 Color temperature: 2700K/3000K/4000K
 CRI: 90
 Installation Method: Ceiling recessed Trimless Adjustable
 System Lumen: 480lm
 System efficacy: 80lm/W
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm
 Life Time: 50.000h
 MacAdam steps: 3
 UGR: <22
 IP Rating: IP65

PHYSICAL CHARACTERISTICS

Dimensions: Ø60*55mm
 Cutout: Ø70mm
 Rotate Angle: N/A
 Tilt Angle: 20°

Additional

Warranty: 3 Years
 (optional 5 year warranty on request)

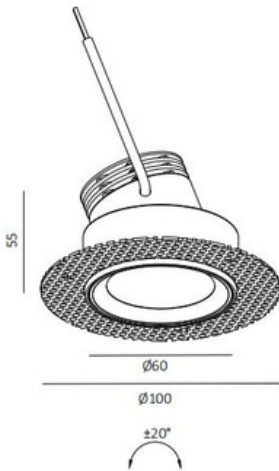

70mm
 5-25mm

LIGHT DISTRIBUTION for 2700K Narrow 15°

h(m)	E(lx)	Ø(m)
1	3084	Ø0.24
2	771.1	Ø0.49
3	342.7	Ø0.74
4	192.8	Ø0.99
5	123.4	Ø1.24

