


## LMDL3266 Gimble Deep

### Description

- Deep recessed adjustable downlight with a slim trim
- UGR19 low glare and CRI90 as standard
- IP54 rated, suitable for bathroom and wet area application
- Adjustable through 355° rotate and 25° angle of tilt
- Customisations available on request

**Finish**  
Black/White

**Material**  
Aluminium



### TECHNICAL CHARACTERISTICS


Light source: Bridgelux COB  
 Output (W): 10W  
 Voltage: 240V  
 Color temperature: 2700K/3000K/4000K  
 CRI: 90  
 Installation Method: Ceiling Recessed Adjustable  
 System Lumen: 760lm  
 System efficacy: 76lm/W  
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm  
 Life Time: 50.000h  
 MacAdam steps: 3  
 UGR: <19  
 IP Rating: IP54

### PHYSICAL CHARACTERISTICS

Dimensions: Ø92\*68mm  
 Cutout: Ø82mm  
 Rotate Angle: 355°  
 Tilt Angle: 25°

### Additional

Warranty: 3 Years  
 (optional 5 year warranty on request)

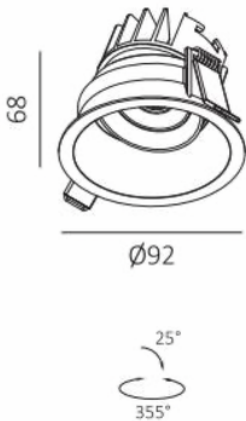

### LIGHT DISTRIBUTION for 3000K medium 23°

h(m)	E(lx)	Ø(m)
1	1660	Ø0.39
2	415.1	Ø0.79
3	184.5	Ø1.19
4	103.8	Ø1.59
5	66.41	Ø1.98

