

## LMDL3639

### Nova Semi Spot



#### Description



- Performance, design and flexibility make this luminaire ideal for residential and commercial application
- Supports all major lighting control types
- Multiple CRI options
- Photometric data shown is for module and Individual lenses only
- Customisations available on request

#### Finish

Black/White

#### Material

Aluminium

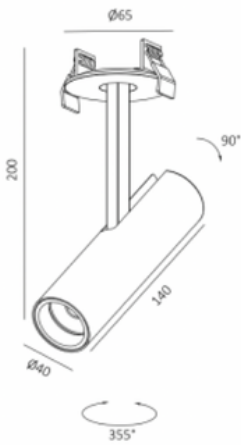

#### TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB  
 Output (W): 13W  
 Voltage: 240V  
 Color temperature: 2700K/3000K/4000K  
 CRI: 80/90/97  
 Installation method: Ceiling Recessed  
 System Lumen: 1053lm  
 System efficacy: 81lm/watt  
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm  
 Life Time: 50.000h  
 MacAdam steps: 3  
 UGR: 14  
 IP Rating: IP20

#### PHYSICAL CHARACTERISTICS

Dimensions: Ø40\*140mm  
 Cutout: Ø52  
 Rotate Angle: 355°  
 Tilt Angle: 90°

#### Additional

Warranty: 3 Years  
 (optional 5 year warranty on request)

#### LIGHT DISTRIBUTION for 2700K spot 21°

h(m)	E(lx)	Ø(m)
1	2172	Ø0.37
2	543.1	Ø0.75
3	241.4	Ø1.12
4	135.8	Ø1.49
5	86.90	Ø1.87

#### LIGHT DISTRIBUTION for 2700K medium 26°

h(m)	E(lx)	Ø(m)
1	2478	Ø0.47
2	619.5	Ø0.94
3	275.3	Ø1.41
4	154.9	Ø1.87
5	99.12	Ø2.34

#### LIGHT DISTRIBUTION for 2700K wide 38°

h(m)	E(lx)	Ø(m)
1	1498	Ø0.68
2	374.5	Ø1.36
3	166.4	Ø2.04
4	93.62	Ø2.73
5	59.92	Ø3.41

