



## LMDL3598

### Solo Mini Fixed

#### Description


- Deep recessed with a slim trim, the Solo is perfect in any multi-residential, or commercial application
- Bridgelux COB CRI90 with 15° to 60° beam angles
- All major control types supported, including Phase-Cut, DALI and Dim to Warm
- Also available to suit a 90mm cut

#### Finish

Black/White

#### Material

Aluminium

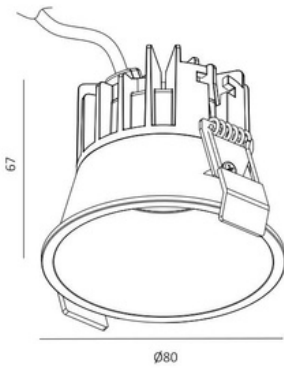

Ø74mm ±0.25mm

#### TECHNICAL CHARACTERISTICS

Light source: Bridgelux COB

Output (W): 10W

Voltage: 240V

Color temperature: 2700K/3000K/4000K

CRI: 90

Installation Method: Ceiling recessed

System Lumen: 980lm

System efficacy: 98lm/W

Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm

Life Time: 50.000h

MacAdam steps: 3

UGR: <19

IP Rating: IP20

#### PHYSICAL CHARACTERISTICS

Dimensions: Ø80\*67mm

Cutout: Ø74mm

Rotate Angle: N/A

Tilt Angle: N/A

#### Additional

Warranty: 3 Years

(optional 5 year warranty on request)

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

