

## LMSD3151

### Vero Compact Adjustable Spot with Halo




#### Description

- Compact adjustable design with built in LED driver
- Suitable for premium architectural applications - Multi Residential, Hospitality and Retail
- Flexibility of multiple dimming options and beam angles
- Customisations available on request



**Finish**  
Black/White

**Material**  
Aluminium



#### TECHNICAL CHARACTERISTICS


Light source: Bridgelux COB  
 Output (W): 11W  
 Voltage: 240V  
 Color temperature: 2700K/3000K/4000K  
 CRI: 90  
 Installation Method: Ceiling Surface Mounted  
 System Lumen: 858lm  
 System efficacy: 78lm/W  
 Dimming Type: Non-Dim, Phase-Cut, DALI, Dim to Warm  
 Life Time: 50.000h  
 MacAdam steps: 3  
 UGR: <21  
 IP Rating: IP20

#### PHYSICAL CHARACTERISTICS

Dimensions: Ø90\*86mm  
 Cutout: NA  
 Rotate Angle: 355°  
 Tilt Angle: 90°

#### Additional

Warranty: 3 Years  
 (optional 5 year warranty on request)

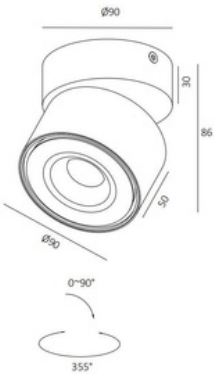

#### LIGHT DISTRIBUTION for 3000K Medium 36°

h(m)	E(lx)	Ø(m)
1	917.2	Ø0.58
2	229.3	Ø1.17
3	101.9	Ø1.76
4	57.30	Ø2.34
5	36.70	Ø2.98

Photometric 3000K 38D Ra.90

The photograph may not match the reference exactly. Please read the product description to identify the finish.